

HEWLETT-PACKARD COMPANY

Legal Department, 20BN
P.O. Box 10301
Palo Alto, California 94303-0890

PATENT APPLICATION

ATTORNEY DOCKET NO. 10991367-1

IN THE U.S. PATENT AND TRADEMARK OFFICE
Patent Application Transmittal Letter

ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Transmitted herewith for filing under 37 CFR 1.53(b) is a(n): ☒ Utility ☐ Design

☒ original patent application,
☐ continuation-in-part application

INVENTOR(S): Shell S. Simpson et al

TITLE: Method For Enhancing The Perceptual Performance Of A Post-Printing Application Environment

Enclosed are:

☒ The Declaration and Power of Attorney. ☒ signed ☐ unsigned or partially signed
☒ 4 sheets of drawings (one set) ☐ Associate Power of Attorney
☐ Form PTO-1449 ☐ Information Disclosure Statement and Form PTO-1449
☐ Priority document(s) ☐ (Other) (fee \$)

CLAIMS AS FILED BY OTHER THAN A SMALL ENTITY				
(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) TOTALS
TOTAL CLAIMS	20 — 20	0	X \$18	\$ 0
INDEPENDENT CLAIMS	3 — 3	0	X \$78	\$ 0
ANY MULTIPLE DEPENDENT CLAIMS	0		\$260	\$ 0
BASIC FEE: Design \$310.00); Utility \$760.00)				\$ 760
TOTAL FILING FEE				\$ 760
OTHER FEES				\$
TOTAL CHARGES TO DEPOSIT ACCOUNT				\$ 760

Charge \$ 760 to Deposit Account 08-2025. At any time during the pendency of this application, please charge any fees required or credit any over payment to Deposit Account 08-2025 pursuant to 37 CFR 1.25. Additionally please charge any fees to Deposit Account 08-2025 under 37 CFR 1.16, 1.17, 1.19, 1.20 and 1.21. A duplicate copy of this sheet is enclosed.

"Express Mail" label no. EH862491686US

Date of Deposit Oct. 29, 1999

I hereby certify that this is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.

By

Typed Name: Terri Walker

Respectfully submitted,

Shell S. Simpson et al

By

Robert C. Mayes

Attorney/Agent for Applicant(s)

Reg. No. 30,405

Date: Oct. 29, 1999

Telephone No.: (208) 396-3047

"Express Mail" mailing label number EH862491686US

Date of Deposit October 29, 1999

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" services under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Typed Name of Person Mailing Paper or Fee: Terri Walker

Signature: Terri Walker

**PATENT APPLICATION
DOCKET NO. 10991367-1**

**METHOD AND APPARATUS FOR ENHANCING THE PERCEPTUAL
PERFORMANCE OF A POST-PRINTING APPLICATION ENVIRONMENT**

INVENTORS:

Shell S. Simpson
Kris R. Livingston

METHOD AND APPARATUS FOR ENHANCING THE PERCEPTUAL PERFORMANCE OF A POST-PRINTING APPLICATION ENVIRONMENT

FIELD OF THE INVENTION

The invention relates to printers and computer networks. More particularly, the invention relates to selection of print features.

BACKGROUND OF THE INVENTION

Over the last several decades, computer systems have become
5 increasingly complex, and, at the same time, have been modified to provide
increasing numbers of options, capabilities and customization features for
specific tasks. Printer technology is a dramatic example of the increased
capabilities that even modest modern computer systems offer compared to
those of a few decades ago. Widespread adoption of features allowing on-the-
10 fly modification of print parameters (e.g., font, print size, mixed graphic/text
output, selection of multiple printers, paper sources etc.) permit very complex
printer operations to be carried out with relative ease, compared to what is
possible with older print technologies, such as those using daisy-wheel printing
systems.

15 The increased capabilities found within modern printer systems
requires increased sophistication in the commands that are sent to the printer in
order to carry out the user's desired print options. In turn, the user has a larger
number of options to select in composing a document to be printed. As a
result, the need to be able to organize and to display printer options in a
20 compact, organized and user-friendly fashion has grown dramatically.

In some printing applications, the entire print job must be processed
before the user is provided with information relating to the status of the print
job. This is generally not problematic for short print jobs but may provide some
user annoyance when the print job is long.

SUMMARY OF THE INVENTION

In accordance with an aspect of the present invention, a method of apprising a user of print job status includes assessing what portion of a print job has been processed, displaying a status of the print job reflecting the portion of the print job that has been processed, iterating assessing and displaying until
5 assessing determines that the print job has been entirely processed and terminating the print job when assessing determines that the print job has been entirely processed.

In accordance with another aspect of the present invention, an article
10 of manufacture includes a computer usable medium having computer readable code embodied therein to cause a display to depict a graphical user interface configured to allow user selection and modification of print engine options for printing a document. The computer readable program code in the article of manufacture is configured to assess what portion of a print job has been
15 processed, display a status of the print job reflecting the portion of the print job that has been processed, iterate assessment and display until assessment determines that the print job has been entirely processed and terminate the print job when assessment determines that the print job has been entirely processed.

In accordance with yet another aspect of the present invention, a
20 computer implemented printer control system includes memory operative to store files representing at least one document to be printed, a print engine responsive to commands and configured to print a document corresponding to a selected one of the files and a display driver configured to provide an image of a graphical user interface in a viewing window. The graphical user interface is
25 configured to allow user selection and modification of print engine options in a printer application for printing the document. The printer control system also includes processing circuitry configured to assess what portion of a print job has been processed in the printer application, display a status of the print job reflecting the portion of the print job that has been processed, iterate
30 assessment and display until assessment determines that the print job has been

entirely processed and terminate the print job when assessment determines that the print job has been entirely processed.

Other features and advantages of the invention will become apparent to those of ordinary skill in the art upon review of the following detailed
 5 description, claims, and drawings.

DESCRIPTION OF THE DRAWINGS

Fig. 1 is a simplified block diagram of a computer system and printer, in accordance with an embodiment of the present invention.

Fig. 2 is a simplified flowchart illustrating a process, in accordance
 10 with an embodiment of the present invention.

Fig. 3 is a simplified view of a graphical user interface for controlling the printer of Fig. 1 using the process shown in the flow chart of Fig. 2, in accordance with an embodiment of the present invention.

Fig. 4 is a simplified view of an exemplary graphical user interface for
 15 controlling the printer of Fig. 1 using the process shown in the flow chart of Fig. 2, in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Fig. 1 is a simplified block diagram of a computer system 10 and printer 12 coupled together via a bus 13, in accordance with an embodiment of
 20 the present invention. The computer system 10 includes a central processing unit (CPU) 14 that is coupled to a data and address bus 16. The data and address bus 16 is coupled to a memory system 18. The memory system 18 includes nonvolatile mass data storage device 20, which may include a CD ROM, floppy drive, hard drive, zip drive, floptical storage, optical storage, tape
 25 storage or other forms of data storage and retrieval devices known in the art. The memory system 18 also includes a read only memory (ROM) 22 and a random access memory (RAM) 24. In one embodiment, the computer system 10 includes the memory system 18 or other computer readable medium bearing software that will be described below. A display 26 and a user interface 28 are

also coupled to the CPU 14 through the data and address bus 16. The computer system 10 includes I/O devices 30 coupled to the data and address bus 16 to promote data communications between the computer system 10 and external data processing and conditioning devices, including the printer 12. It will be appreciated that more complex computer systems are also used in conjunction with printers 12, however, for clarity of explanation and ease of understanding, the present invention will be described in the context of the computer system 10 of Fig. 1.

In one embodiment, the user interface 28 includes a keyboard and a cursor manipulating tactile input device, such as a mouse or a touchpad. However, it is understood that other forms of input devices can also be used including voice recognition systems, joysticks, graphics tablets, data readers, card readers, magnetic and optical readers, other computer systems etc. The user receives visual feedback via the display 26. According to one construction, the display 26 comprises a graphics display terminal, such as a CRT display or a liquid crystal display. The user enters commands and text via the user interface 28 and observes feedback from the computer system 10 using the display 26. The CPU 14 operates on data using modules composed of lines of code that typically are stored in RAM 24, in response to the commands from the user, and provides results that may be stored in the memory system 18, displayed on the display 26 or that may be communicated to other devices external to the computer system 10, such as the printer 12. The modules may or may not be defined by a subroutine separate from a main program. It will be understood that while the invention is described in terms of a computer system 10 and a printer 12, it may also be practiced in systems that include multiple computers, such as servers and the like.

Fig. 2 is a simplified flowchart illustrating a process P1 in accordance with one aspect of the invention. The process P1 begins with a step S1. In the step S1, the user initiates a print job to print a document represented in the memory system 18 of Fig. 1. In a step S2, a portion of the print job is translated to an intermediate representation. In a step S3, the intermediate

representation of the portion of the print job is transferred to a printer application. In a step S4, the printer application stores the intermediate representation of the portion of the print job. In a step S5, the process P1 determines the status of the print job. In a step S6, the process P1 displays the status in a graphical user interface (shown in Fig. 3). In a query task S7, the process P1 determines if the user has opted to examine and/or modify print features. When the process P1 determines that the user has opted to examine or modify the print features, control passes to a step S8. In the step S8, the process P1 displays a feature dialog box together with controls for the feature. An exemplary feature dialog box is shown in Fig. 4. In a step S9, the process P1 modifies the print job in response to user input. Control then passes to a query task S10. In the query task S10, the process P1 determines if the user has opted to return to printing the job. When the query task S10 determines that the user has opted to return to printing, control passes to the step S2, and the printing job continues to execute. When the query task S10 determines that the user has not opted to continue printing, control returns to the step S8.

When the step S7 determines that the user has not opted to review or modify the print features, control passes to a query task S11. In the query task S11, the process P1 determines if the print job has ended. When the query task S11 determines that the print job has not ended, control passes to the step S2. When the query task S11 determines that the print job has ended, control passes to a step S12. In the step S12, the process P1 displays a "print job complete" message. The process P1 then ends.

Fig. 3 is a simplified view of a graphical user interface for controlling the printer 12 of Fig. 1 using the process P1 shown in the flow chart of Fig. 2, in accordance with an embodiment of the present invention. Fig. 3 shows a graphical user interface 34 including a status portion 36, a print preview image 38 corresponding to the page indicated in the status portion 36, user-selectable buttons 40, 42 and 44, labeled "Features," "Print Now" and "Cancel," respectively, and a user-selectable feature 46 labeled "Show Preferences." The status portion 36 is updated in the steps S5 and S6 of the process P1 of Fig. 2.

In one embodiment, the graphical user interface 34 is displayed for an interval that is long enough to allow the user to modify the print features. In one embodiment, the user may pre-select the duration of the interval for displaying the graphical user interface using the "Show Preferences" feature 46.

5 When the user decides to modify features of the print job, the user may select the "Features" button 40 to transfer from the graphical user interface 34 of Fig. 3 to a feature selection dialog box, shown in Fig. 4. The user may opt to have the print job begin immediately by selecting the "Print" button 42, or may opt to cancel the print job by selecting the "Cancel" button 44. When
10 the user opts to modify features of the print job by selecting the "Features" button 40, a display such as the feature selection dialog box of Fig. 4 results, temporarily suspending processing of the print job and allowing the user to select features for modification and also allowing the user to modify the selected features.

15 Fig. 4 shows a simplified view of an exemplary graphical user interface for controlling the printer 12 of Fig. 1 using the process P1 shown in the flow chart of Fig. 2, in accordance with an embodiment of the present invention. The exemplary graphical user interface of Fig. 4 includes a list of features 64, a scroll bar 66 for displaying additional entries in the list 64, a print
20 preview image 68 corresponding to a user-selectable page of the document to be printed, a scroll bar 70 and a button 72 for selecting the page for the print preview image 68.

In the example of Fig. 4, the user has selected the "Watermarks" feature from the list of features 64 using the scroll bar 66 in the step S7 of
25 Fig. 2. The user has selected page 11 for the print preview image 68 using the scroll bar 70/button 72. The print preview image 68 includes a watermark 76b displaying the legend "Secret" as it will appear on page 11 when it is printed.

The exemplary display of Fig. 4 also includes user-selectable buttons 82, 84 and 86, labeled "Print," "Defer" and "Cancel," respectively. The user
30 has set the "Watermarks" feature to "Secret" using a user-editable text box 92 in the step S9. When the user selects the "Print" button 82, the print job is re-

started and control passes back to the step S2. The user may also opt to defer or cancel the print job using the buttons 84 or 86, respectively.

By providing the graphical user interface shown in Fig. 3 and thereby apprising the user of the status of the print job, the user's perception of progress of the print job is improved, compared to systems where the user is not provided with feedback about print job status until the entire print job has been processed.

The protection sought is not to be limited to the disclosed embodiments, which are given by way of example only, but instead is to be limited only by the scope of the appended claims.

Case 10991367-1

CLAIMS

What is claimed is:

- 1 1. A method of apprising a user of print job status comprising
2 assessing what portion of a print job has been processed, displaying a status of
3 the print job reflecting the portion of the print job that has been processed,
4 iterating assessing and displaying until assessing determines that the print job
5 has been entirely processed and terminating the print job when assessing
6 determines that the print job has been entirely processed.
- 1 2. The method of claim 1, further comprising translating a portion
2 of a print job to an intermediate representation in a printer driver, transferring
3 the intermediate portion to the printer application and storing the intermediate
4 portion of the print job in the printer application.
- 1 3. The method of claim 1, further comprising displaying a print job
2 complete message when assessing determines that the print job has been
3 entirely processed.
- 1 4. The method of claim 1, wherein displaying a status further
2 comprises displaying a user-selectable feature control.
- 1 5. The method of claim 4, further comprising determining when
2 the user has selected the user-selectable feature control and then displaying a
3 list of user-selectable features instead of displaying the status.
- 1 6. The method of claim 5, further comprising interrupting the print
2 job when the user has selected the user-selectable feature control.
- 1 7. The method of claim 6, further comprising re-starting the print
2 job when the user provides a print command.

1 8. An article of manufacture comprising a computer usable
2 medium having computer readable code embodied therein to cause a display to
3 depict a graphical user interface configured to allow user selection and
4 modification of print engine options for printing a document, the computer
5 readable program code in the article of manufacture being configured to assess
6 what portion of a print job has been processed, display a status of the print job
7 reflecting the portion of the print job that has been processed, iterate
8 assessment and display until assessment determines that the print job has been
9 entirely processed and terminate the print job when assessment determines that
10 the print job has been entirely processed.

1 9. The article of manufacture of claim 8, the computer readable
2 program code in the article of manufacture being configured to translate a
3 portion of a print job to an intermediate representation, transfer the intermediate
4 portion to the printer application and store the intermediate portion of the print
5 job in the printer application.

1 10. The article of manufacture of claim 8, the computer readable
2 program code in the article of manufacture being configured to display a print
3 job complete message when assessment determines that the print job has been
4 entirely processed.

5 11. The article of manufacture of claim 8, the computer readable
6 program code in the article of manufacture being configured to display a user-
7 selectable feature control together with the status.

1 12. The article of manufacture of claim 11, the computer readable
2 program code in the article of manufacture being configured to determine when
3 the user has selected the user-selectable feature control and then display a list
4 of user-selectable features instead of the status.

1 13. The article of manufacture of claim 12, the computer readable
2 program code in the article of manufacture being configured to interrupt the
3 print job when the user has selected the user-selectable feature control.

1 14. The article of manufacture of claim 13, the computer readable
2 program code in the article of manufacture being configured to re-start the print
3 job when the user provides a print command.

1 15. A computer implemented printer control system comprising:
2 memory operative to store files representing at least one document to
3 be printed;
4 a display configured to provide an image of a graphical user interface
5 in a viewing window, the graphical user interface configured to allow user
6 selection and modification of print engine options in a printer application for
7 printing the document; and
8 processing circuitry configured to assess what portion of a print job
9 has been processed in the printer application, display a status of the print job
10 reflecting the portion of the print job that has been processed, iterate
11 assessment and display until assessment determines that the print job has been
12 entirely processed and terminate the print job when assessment determines that
13 the print job has been entirely processed.

1 16. The printer control system of claim 15, wherein the processing
2 circuitry comprises a processor configured to translate a portion of a print job to
3 an intermediate representation, transfer the intermediate portion to the printer
4 application and store the intermediate portion of the print job in the printer
5 application.

1 17. The printer control system of claim 15, wherein the processing
2 circuitry comprises a processor configured to display a user-selectable feature
3 control together with the status.

1 18. The printer control system of claim 15, wherein the processing
2 circuitry comprises a processor configured to display a user-selectable feature
3 control together with the status, determine when the user has selected the user-
4 selectable feature control and then display a list of user-selectable features
5 instead of the status.


6 19. The printer control system of claim 18, wherein the processing
7 circuitry comprises a processor configured to interrupt the print job when the
8 user has selected the user-selectable feature control.


1 20. The printer control system of claim 19, wherein the processing
2 circuitry comprises a processor configured to re-start the print job when the user
3 provides a print command.


ABSTRACT


A method of apprising a user of print job status includes assessing what portion of a print job has been processed, displaying a status of the print job reflecting the portion of the print job that has been processed, iterating assessing and displaying until assessing determines that the print job has been
5 entirely processed and terminating the print job when assessing determines that the print job has been entirely processed.

Case 10991367-1

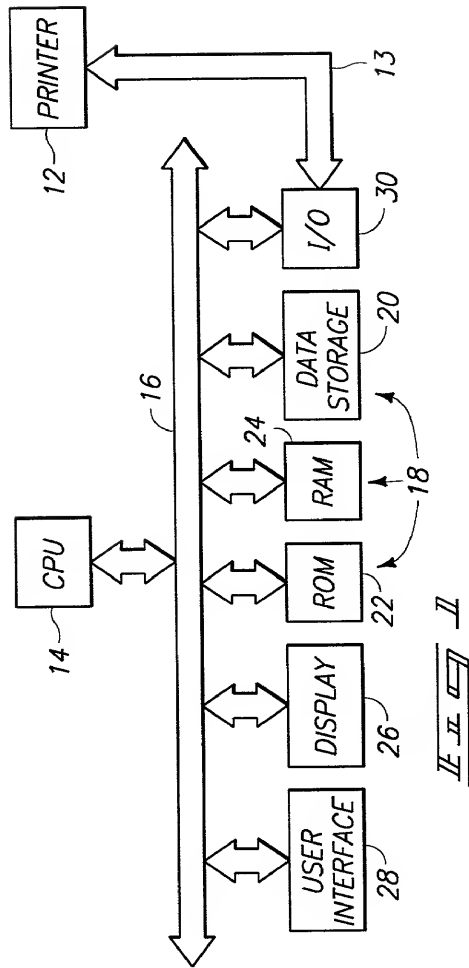

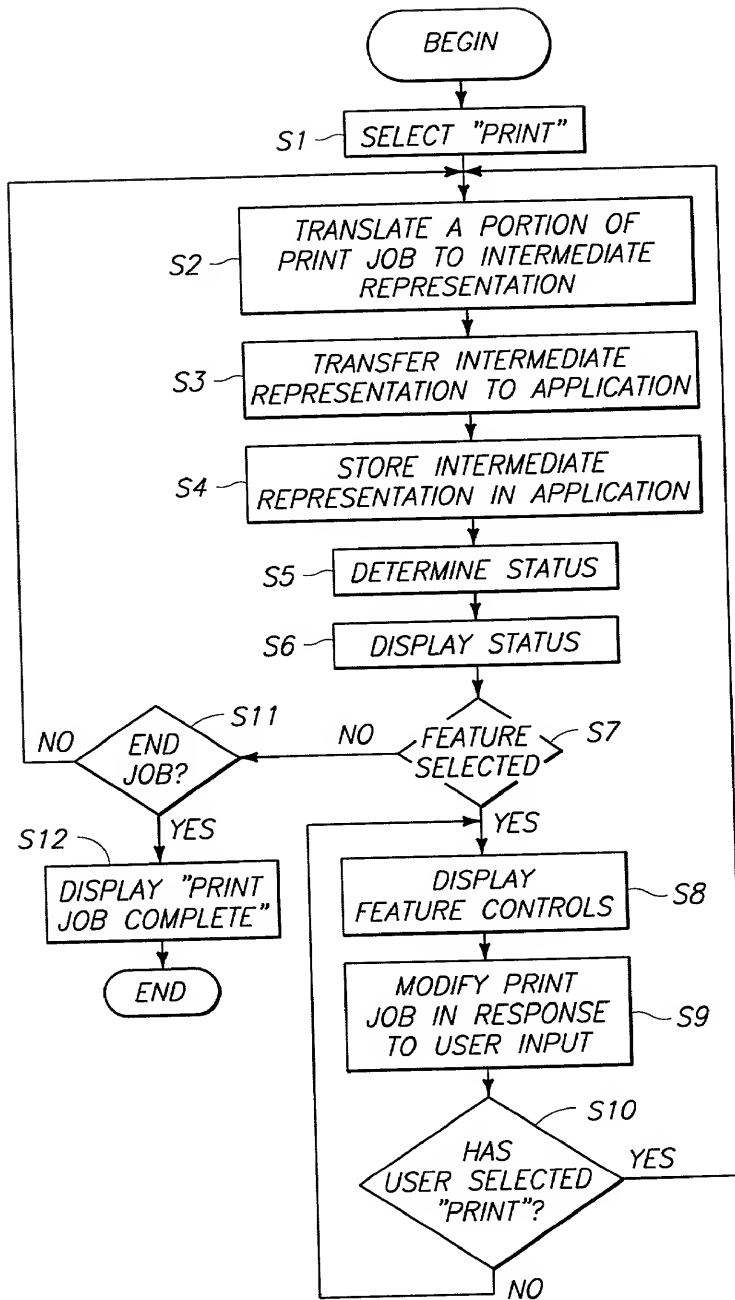

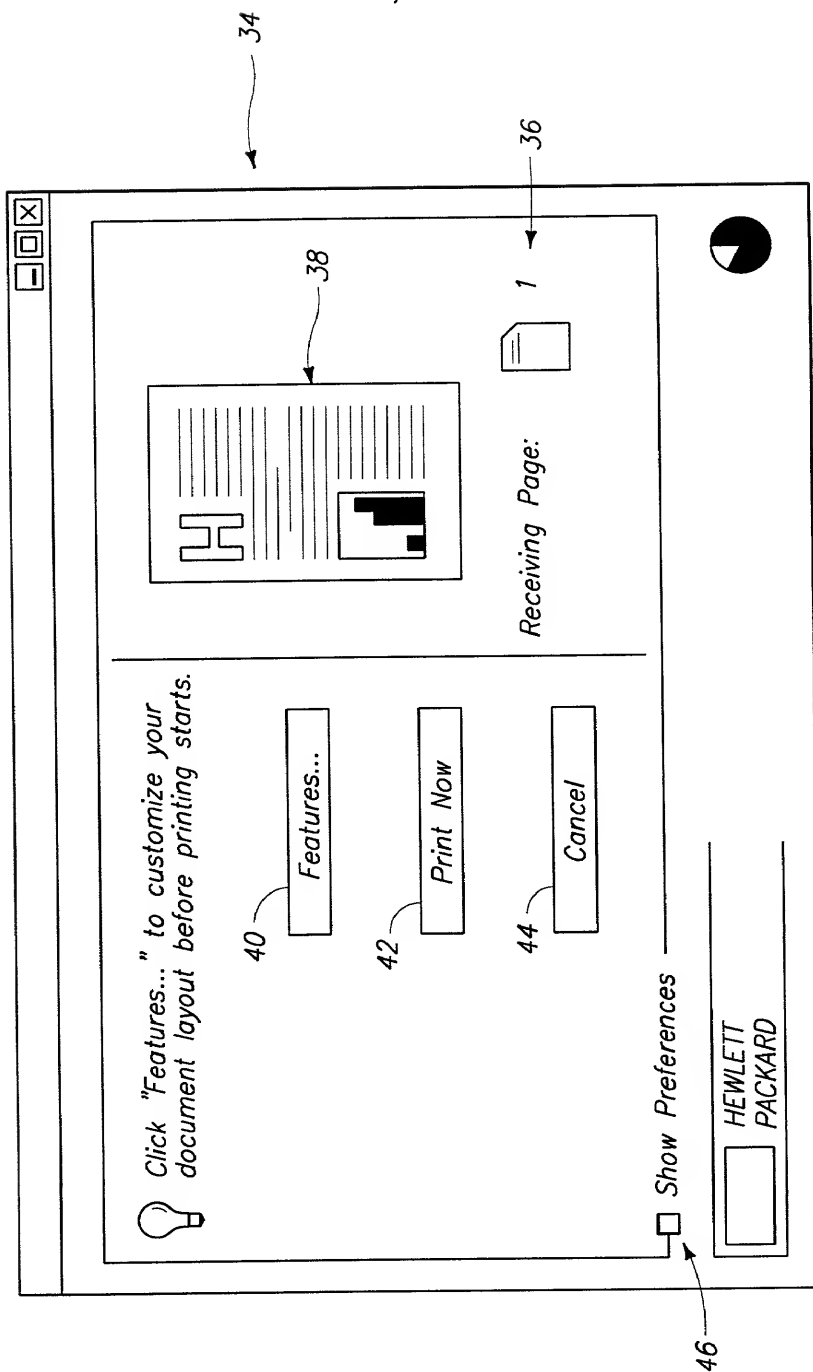

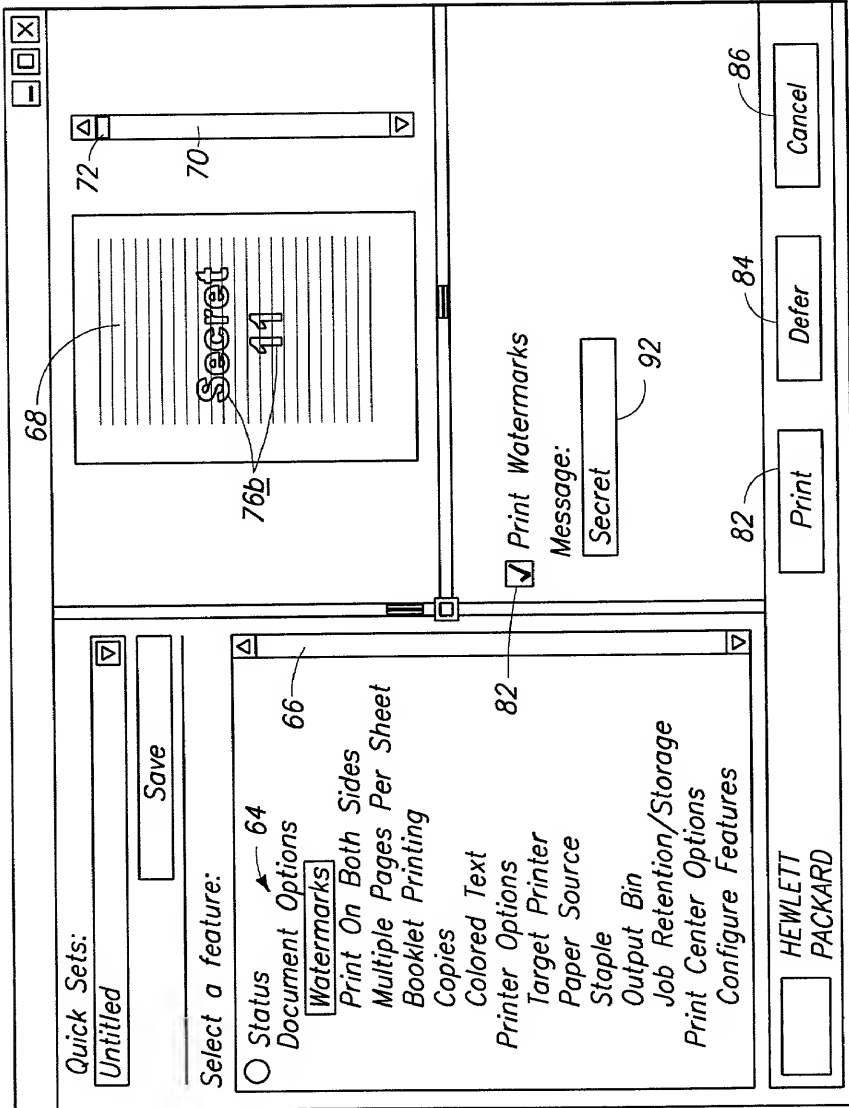

DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

ATTORNEY DOCKET NO. 10991367-1

As a below named inventor, I hereby declare that:

My residence/post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Method And Apparatus For Enhancing The Perceptual Performance Of A Post-Printing Application Environment

The specification of which is attached hereto unless the following box is checked:

() was filed on _____ as US Application Serial No. or PCT International Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understood the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR 1.56.

Foreign Application(s) and/or Claim of Foreign Priority

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor(s) certificate listed below and have also identified below any foreign application for patent or inventor(s) certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NUMBER	DATE FILED	PRIORITY CLAIMED UNDER 35 U.S.C. 119
			YES: _____ NO: _____
			YES: _____ NO: _____

Provisional Application

I hereby claim the benefit under Title 35, United States Code Section 119(e) of any United States provisional application(s) listed below:

APPLICATION SERIAL NUMBER	FILING DATE

U. S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NUMBER	FILING DATE	STATUS (patented/pending/abandoned)

POWER OF ATTORNEY:

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) listed below to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Anthony J Baca

Leslie G. Murray

Lane R. Simmons

Robert C. Mayes

Reg. No. 33,472

Reg. No. 31,183

Reg. No. 37,721


Reg. No. 30,405

Send Correspondence to:
 IP Administration
 Legal Department, 20BN
 HEWLETT-PACKARD COMPANY
 P.O. Box 10301
 Palo Alto, California 94303-0890

Direct Telephone Calls To:

Leslie G. Murray
 (208) 396-2880

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Inventor: Shell S. SimpsonCitizenship: USResidence: 5196 N. Maidstone Way, Boise, ID 83713Post Office Address: Same as residenceInventor's Signature: Date: 10/29/99

DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION (continued)

ATTORNEY DOCKET NO. 10991367-1

Full Name of # 2 joint inventor: Kris R. Livingston Citizenship: US

Residence: 11232 W. Hickory Bark Drive, Boise, ID 83713

Post Office Address: Same as Residence


Inventor's Signature

10-29-99
Date

Full Name of # 3 joint inventor: _____ Citizenship: _____

Residence: _____

Post Office Address: _____

Inventor's Signature Date

Full Name of # 4 joint inventor: _____ Citizenship: _____

Residence: _____

Post Office Address: _____

Inventor's Signature Date

Full Name of # 5 joint inventor: _____ Citizenship: _____

Residence: _____

Post Office Address: _____

Inventor's Signature Date

Full Name of # 6 joint inventor: _____ Citizenship: _____

Residence: _____

Post Office Address: _____

Inventor's Signature Date

Full Name of # 7 joint inventor: _____ Citizenship: _____

Residence: _____

Post Office Address: _____

Inventor's Signature Date

Full Name of # 8 joint inventor: _____ Citizenship: _____

Residence: _____

Post Office Address: _____

Inventor's Signature Date